




The I-CON wall boxes are the JOINON solution designed and studied for integration into private and semi-public contexts in accordance with the international standard IEC 61851-1 ed. 3. They feature an elegant and compact design, a special "one-hand recharge" function, a vandal-proof socket as an alternative to the cable and holder connector integrated in the station, an IP55 protection rating together with an IK10 impact rating, smart load management, back-lighting, and various installation options: wall-mounting, flush-mounting or floor-mounting.

INPUT		- Socket/Connector Nr. (Type)		1 (Type 2 connector with 5 mt. cable)
Terminal blocks	5 x 10 mm ²	Charging activation	Remotely managed, via OCPP 1.6J	
Rated current	32 A	Human Interface	RGB Led	
Total power	22 Kilowatt	Connectivity	LAN	
OUTPUT		- MECHANICAL FACTS		-
Rated voltage	400 V	Mounting and installation	Wall mounting (floor mounting with support)	
Current supplied (max)	32 A	Colour	Dark grey	
Maximum current	22 Kilowatt	Material	Thermoplastic (Post-industrial origin)	
Thermal-magnetic protection	Currently not present	External treatments	No	
Type of residual current protection	Currently not present	IP degree	IP55	
Power meter	YES (MID)	Mechanical resistance	IK10	
DC Leakage check	Yes	Operating temperature	-25 +50 °C	
(Auto)restart electrical protections	Currently not present	Customizations	Yes (front)	

DIMENSIONAL

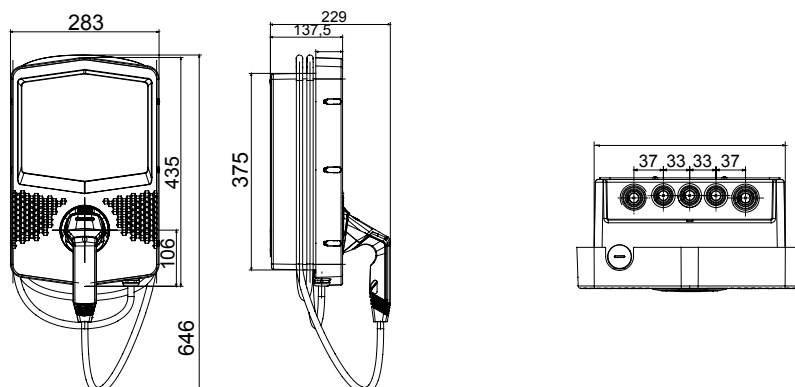

TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10

STANDARDS/APPROVALS

