

On request



ELIA FL is a LED outdoor floodlight available in low, medium and high power versions for lighting external industrial areas, such as car parks and walkways or driveways. It can be mounted on surfaces, ceilings or on the ground using the adjustable steel bracket supplied with the device, or in the pole head version, courtesy of the dedicated accessory for poles with a diameter of up to 61mm. Crafted from black powder-coated die-cast aluminium, it is available in four sizes and powers, with integrated power supply in the On/Off or DALI options, three types of optic (30°, 60° and asymmetrical) with a colour temperature of 4,000K (neutral white) and a colour rendering index of more than 80. Tough and durable, ELIA FL has been designed to withstand surges of up to 10KV and temperature variations from -30 °C to + 50 °C, and offers protection from water and dust penetration of up to level IP66 and from shocks and impacts of up to level IK08. ELIA FL is quick and easy to install thanks to its limited weight and adjustable bracket.

GENERAL INFORMATION

Context	Industry, Logistic, Façade, Sport
Luminaire	LED luminaire with small, mid and high lumen power
Aplicație	Intern / Extern
Unique digital code (Datamatrix)	Currently not present

Culoare	Negru
Tip sursă de lumină	LED
Puterea sistemului	200 W
LED Lifetime	L80B50 (Tq25°) = 89.000h
Greutate (Kg)	6.3
Garanție	5 ani
Temperatură de stocare	-40° +85°
Operating temperature	-30° +50°

MATERIALS

Body	Aluminiu turnat
Ecran	Flat silked tempered glass 4mm thick with Gewiss logo

Optic	With high efficiency optic system
Gasket	-
Locking Hook	-
External screw	Oțel
Colour	Powder coating

STANDARDS AND APPROVALS

Clasificare	-
Dispozitiv cu temperatură la suprafață redusă	-
Certificare DIN 18032-3	-
IPEA	-
Clasă izolație	I
Clasă de protecție IP	IP66
Cod IK	IK08
Glow Test conductori	750 °C

OPTIC AND ILLUMINATING FEATURES

Optică	Asimetric
Unified Glare Rating	ULOR = 0%
Lumină ieșire (lm)	26000
Efficiency (lm/W)	130

Culoare Temperatură	4000 K
Color Rendering Index	CRI 80
Standard Deviation Colour Matching	SDCM = 5
Photobiological Risk Class	RG0

ELECTRICAL AND LIGHTING FEATURES

Tensiune de alimentare	100-240 V
Frecvență nominală (Hz)	50 / 60
Driver	Included
Driver failure rate	F10 = 80.000h Tq25°C
Overvoltage protection	Overvoltage protection 10-6kV


CONTROL SYSTEM

Control System	PORNIȚ OPRIT
----------------	--------------


INSTALLATION AND MAINTENANCE

Mounting and installation	Ceiling - Wall - Floor
Tilt	With adjustable bracket assembled
Wiring	With power cable
Prindere	-
Light source replaceability	By professional
Controlgear replaceability	By professional
Driver Box	Integrat
Suprafață maximă expusă la vânt	0,15 m²

DIMENSIONAL

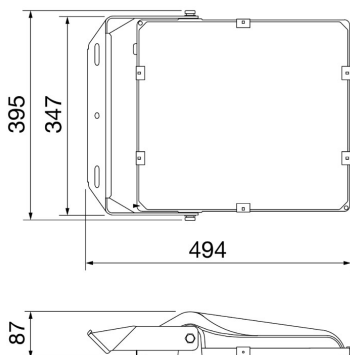

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IP66

IK

IK08

GWT

750 °C

On request

STANDARDS/APPROVALS

