

■ Datasheet: El. Main branch term., 4 pole, 125A, in. 1x35mm², out. 10x16mm²



IKB04035

■ SCHRACK-INFO

Article-description: El. Main branch term., 4 pole, 125A, in. 1x35mm², out. 10x16mm²

■ Assembly details

Mounting on DIN-rail or on base plate. Time savings in cabling and approximately 80% space savings. Modular construction, 1-4 pole Systems can be built with several blocks.

■ Technical data

	Material	Colour
Clamping body	Brass	Plain
Housing	PA66-V0	grey
Housing body	PC-V2	clear
Hexagon socket set screw	Steel	Zn-Plated

■ General data

Heat defelction temp.	PA66 ? 140°C / PC ? 120°C
Comparative tracking index	PA66 = 600V / PC = 300V
Standard	IEC 60 947 -7 -1

■ Electrical data

	IEC
max. electrical load	125A
max. operating voltage	690V
Protection	IP20
Short circuit withstand	Ipk 29kA / Icw 1s 4,2kA

■ Cross section


	U - single wire	K - fine wire (with sleeve)	Torque
	R - multi wire	F - fine wire (with sleeve)	
	Incomer		
2 x Ø9mm	10mm² - 35mm² 8 AWG - 2 AWG	10mm² - 25mm² 8 AWG - 4 AWG	1,5Nm 13.2 lbf.in
	Outgoings		
10 x Ø6,8mm	2,5mm² - 16mm² 14 AWG - 4 AWG		1,5Nm 13.2 lbf.in

■ Approval and Marking

The products are CE conform and correspond to the RoHS of the EU.

■ Datasheet: El. Main branch term., 4 pole, 125A, in. 1x35mm², out. 10x16mm²

■ Dimensional drawing

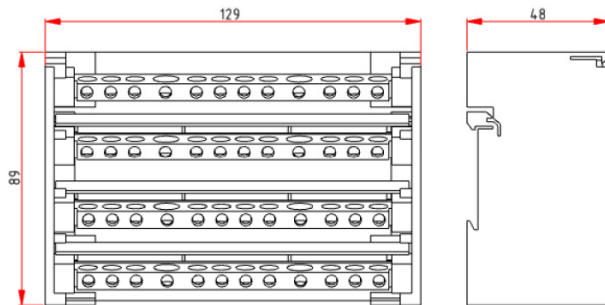

■ Models

Description	Order No.
El. Main branch term., 4 pole, 125A, in. 1x35mm ² , out. 10x16mm ²	IKB04035